



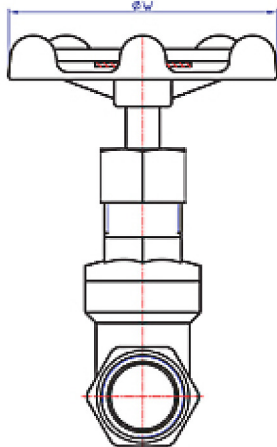

特徵 FEATURES

- 管螺紋按照PIPE THREAD IN ACCORDANCE: NPT, BSPT, DIN259, DIN2999, ISO228 CLASS A
- 壓力等級CLASS 200 W.O.G.
- 精密鑄造INVESTMENT CASTING BODY
- 內螺紋與螺紋連接閥蓋
INSIDE SCREW AND SCREWED BONNET WEDGE DISC
- 可更換球墊RENEWABLE SEAT
- 材料MATERIAL:
SUS316/ASTM A351
Gr-CF8M/DIN1.4408

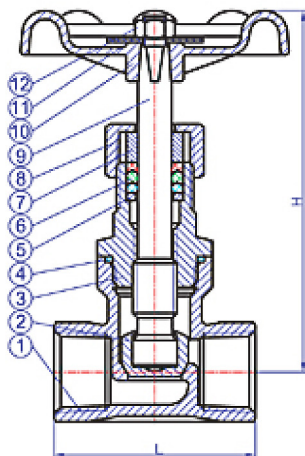

材質表 MATERIALS LIST

ITEM	部件名稱	PART NAME	MATERIAL
1	閥體	BODY	CF8M
2	閥瓣	DISC	CF8M
3	閥蓋	BONNET	CF8M
4	大薄片	GASKET	PTFE
5	止退片	WHORL GASKET	SUS304
6	中口	PACKING	PTFE
7	套筒	GLAIND	SUS304
8	閥蓋螺母	CAP NUT	CF8M
9	軸心	STEM	SUS316
10	手輪	HANDLE	ALUMINNUM
11	銘牌	NAMEPLATE	ALUMINNUM
12	軸心螺母	STEM NUT	SUS304

尺寸表 DIMENSIONS

SIZE	DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
	NPS	6	10	15	20	25	32	40	50
L		52	52	60	70	80	90	105	120
H		94.5	94.5	94.5	100	109.5	129.5	129.5	138.5
H		106	106	106	114	127	150	154	169.5
W		70	70	70	80	80	90	100	100
WEIGET/KGS		0.338	0.320	0.329	0.472	0.660	1.010	1.290	1.822