


EB-1J, 2J, 1JL, 2JL



- Bellows
- Sleeve
- Ball
- Single type
- Double type
- PTFE
- Copper pipe

■Features

1. Complies with JIS B 2352 (Bellows type expansion joints: Application A) of Japanese Industrial Standards.
2. No need for retightening and replacement due to aging since packing is not used. Easy to maintain and manage.
3. Simple structure since flange, short pipe and bellows are united.
4. Outer pipe is attached in order to protect the bellows from damage due to external impact.
5. Stainless steel inner pipe is attached in order to prevent fluid pressure loss, vibration, impact, corrosion, etc.
6. Stainless steel made wetted parts offer high resistance to corrosion and ensures distinguished durability.
7. EB-1JL and 2JL, use a loose flange on the end connection and can absorb the displacement of the circumference side of the bolt hole.

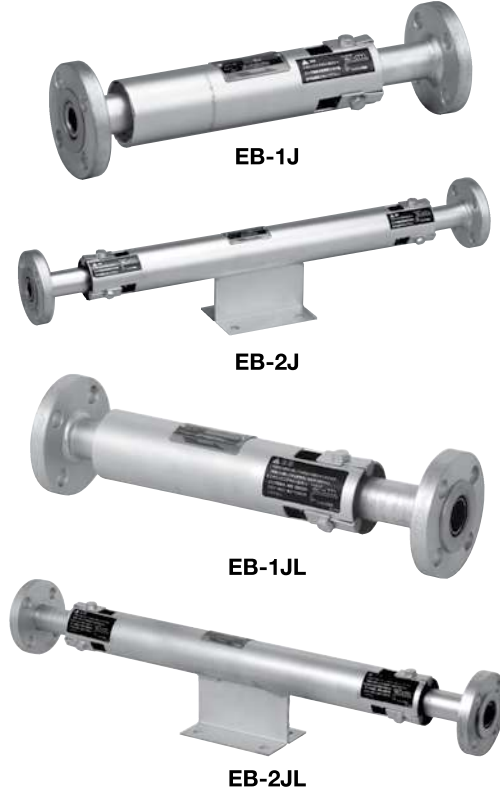

■Specifications

Model	EB-1J	EB-1JL	EB-2J	EB-2JL
Application	Steam, Air, Cold and hot water, Oil, Other non-dangerous fluids			
Maximum pressure	1.0 MPa			
Max. temperature	220°C			
Max. axial extension	35 mm (Expansion 10 mm Compression 25 mm)		70 mm (Expansion 20 mm Compression 50 mm) *	
Material	Outer pipe			
	Carbon steel			
Material	Bellows, inner pipe			
	Stainless steel (SUS316L)			
Connection	JIS 10K FF flanged	JIS 10K loose flanged	JIS 10K FF flanged	JIS 10K loose flanged
Pressure test (water pressure)	1.5 MPa			

* Expansion of one side from the centering anchor base is 10 mm and compression is 25 mm.

· Available with all stainless steel made.


· Available with nominal size from 300A to 450A. (Single type: EB-3, Double type: EB-4)




EB-3

■ Dimensions (mm) and Weights (kg)

· EB-1J

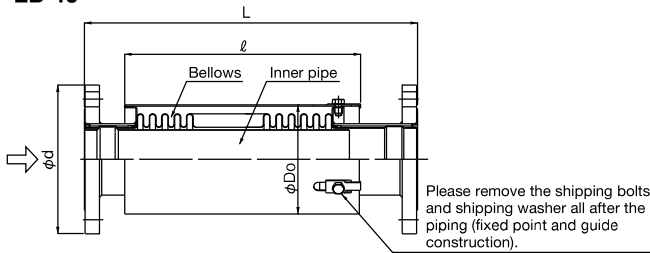


· EB-1JL

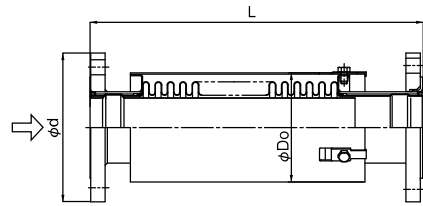


Nominal size	L	Max. operating length	Min. operating length	Max. axial extension δ	Do	d	ℓ	Weight
20A	365	375	340	35	58.2	20.6	235	2.6
25A	365	375	340	35	58.2	20.6	235	3.3
32A	365	375	340	35	73.2	28.1	235	4.8
40A	365	375	340	35	73.2	34.1	235	5.0
50A	365	375	340	35	98.2	44.0	239	5.7
65A	415	425	390	35	109.7	59.5	289	8.9
80A	415	425	390	35	135.7	72.0	288	10.1
100A	415	425	390	35	161.7	97.0	288	12.9
125A	440	450	415	35	212.1	121.0	292	21.0
150A	440	450	415	35	235.1	143.0	293	26.3
200A	440	450	415	35	291.6	193.0	280	35.3
250A	465	475	440	35	332.6	241.0	287	52.5

· Available with nominal size from 300A to 450A (EB-3).

· EB-2J

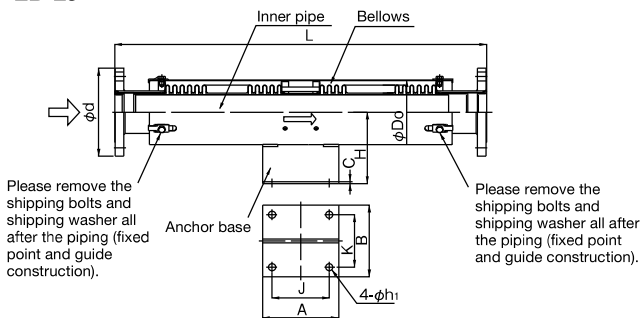

· EB-2JL

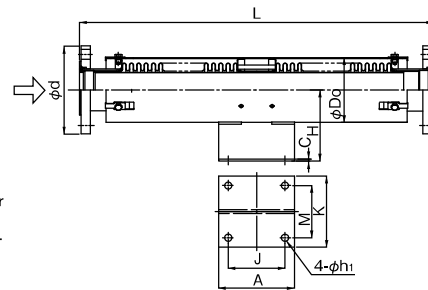

Nominal size	L	Max. operating length	Min. operating length	Max. axial extension δ	Do	d	Dimensions of anchor base-JIS B 2352								Weight
							H	J	K	A	B	C	h_1	Bolt size	
20A	680	700	630	70	60.5	20.6	100	100	60	135	95	3.2	12	M10	4.6
25A	680	700	630	70	60.5	20.6	100	100	60	135	95	3.2	12	M10	5.5
32A	680	700	630	70	76.3	28.1	120	100	70	135	105	3.2	12	M10	6.7
40A	680	700	630	70	76.3	34.1	120	100	70	135	105	3.2	12	M10	7.0
50A	680	700	630	70	101.6	44.0	130	100	80	140	120	3.2	15	M12	9.8
65A	780	800	730	70	114.3	59.5	140	120	100	160	140	4.0	15	M12	11.1
80A	780	800	730	70	139.8	72.0	150	120	110	160	150	4.0	15	M12	12.6
100A	880	900	830	70	165.2	97.0	170	120	130	160	175	4.0	19	M16	16.3
125A	880	900	830	70	216.3	121.0	200	120	150	175	205	4.0	19	M16	34.5
150A	930	950	880	70	236.4	143.0	220	160	180	215	235	4.5	23	M20	41.6
200A	930	950	880	70	293.4	193.0	250	160	220	215	285	4.5	25	M22	59.9
250A	980	1000	930	70	334.4	241.0	300	180	280	255	375	4.5	27	M24	83.0

· Available with nominal size from 300A to 450A (EB-4).