

WITH PNEUMATIC ACTUATOR, CLASS 150 CAST STEEL BALL VALVES

KITZ Fig: FAS-150SCTDZ

Sizes: 2 1/2-inch(65-mm)

SPRING RETURNANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211, FLANGED ENDS.

Standards

- . End to End: ASME B16.10 CLASS 150
- . End Connection: ASME B16.5 CLASS 150
- . Wall Thickness: ASME B16.34 CLASS 150

Test Standard

- . API 598

Dimensions

| SIZE(inch/mm) | L | L1 | H | D1 | Kg |
|---------------|-------|-------|-------|----|----|
| 2 1/2 65 | 190.0 | 85.0 | 409.0 | | |
| 3 80 | 203.0 | 94.0 | 475.0 | | |
| 4 100 | 229.0 | 110.0 | 503.0 | | |
| 5 125 | 356.0 | 150.0 | 548.0 | | |
| 6 150 | 394.0 | 175.0 | 581.0 | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |




Material List

| NAME OF PART | MATERIAL | SPECIFICATION |
|--------------|-----------------|--------------------|
| BODY | CAST STEEL | A216 Gr. WCB/SCPH2 |
| BODY CAP | CAST STEEL | A216 Gr. WCB/SCPH2 |
| STEM | STAINLESS STEEL | 304SS |
| BALL | STAINLESS STEEL | 304SS |

Specifications


WITH PNEUMATIC ACTUATOR, CLASS 150 CAST STEEL BALL VALVES, SPRING RETURNANTI-STATIC DEVICE, FULL BORE, CONFORM TO ISO5211, FLANGED ENDS.

End to End : ASME B16.10 CLASS 150, End Connection : ASME B16.5 CLASS 150, Wall Thickness : ASME B16.34 CLASS 150, Test Standard : API 598, Sizes : 2 1/2-inch(65-mm), BODY MATERIAL : CAST STEEL, BODY CAP MATERIAL : CAST STEEL, STEM MATERIAL : STAINLESS STEEL, BALL MATERIAL : STAINLESS STEEL, KITZ Fig : FAS-150SCTDZ

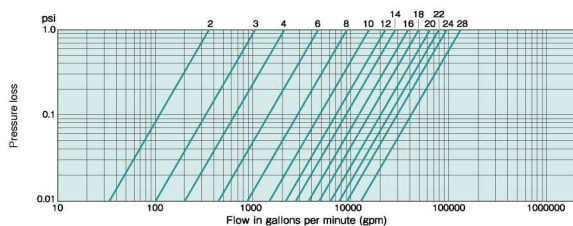

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.



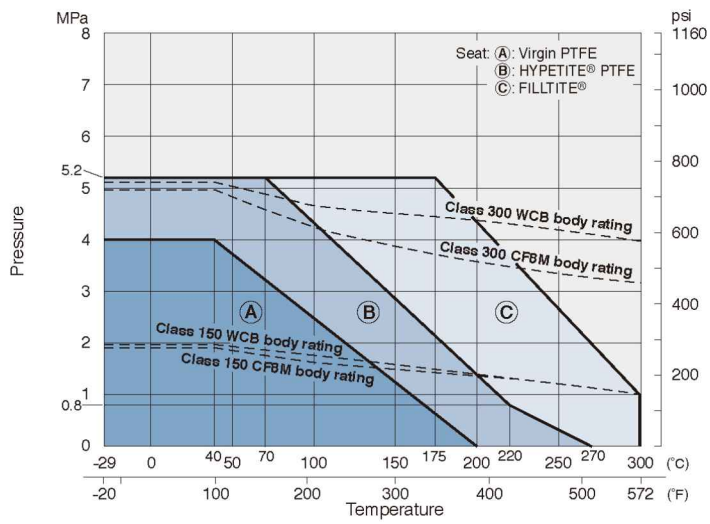

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.



KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
© KITZ Corporation. All Right Reserved.

