



SERIES F 7399 - JIS 5K , 16K Emergency Shut-Off Valves - A & L Type

Manufactured in accordance to JIS F 7400 / Flanges as per JIS B 2240 - 5K, 16K

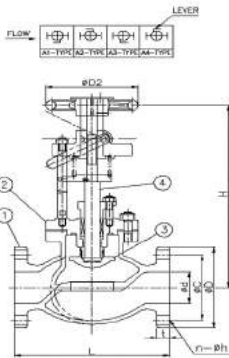

SERIES F 7399 - "A" Type

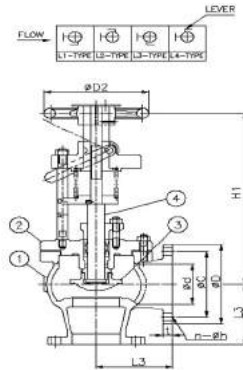

SERIES F 7399 - "L" Type


Part No.	Material
1 - Body	Bronze
2 - Bonnet	Bronze
3 - Disc	Bronze
4 - Stem	Brass

Test Pressure MPa[Kgf/cm ²]	
Body	0.7 [7.0]
Seat	0.2 [2.0]


	Size	d	D	C	n-h	t	H	H1	L	L3	D2
F 7399 -5K	015	15	80	60	4-12	9	260	240	110	75	120
	020	20	85	65	4-12	10	253	250	120	85	120
	025	25	95	75	4-12	10	253	250	120	85	140
	032	32	115	90	4-15	12	290	275	160	100	140
	040	40	120	95	4-15	12	290	275	160	100	140
F 7399 -10K	015	15	95	70	4-15	12	260	240	110	75	120
	020	20	100	75	4-15	14	253	250	130	85	120
	025	25	125	90	4-19	14	253	250	130	85	140
	032	32	135	100	4-19	16	290	275	170	100	140
	040	40	145	105	4-19	16	290	275	170	100	140

SERIES F 7399 - JIS 5K , 10K Emergency Shut-Off Valves - A & L Type

Manufactured in accordance to JIS F 7400 / Flanges as per JIS B 2240 - 5K, 10K

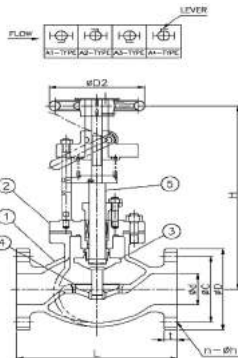

SERIES F 7399 - "A" Type

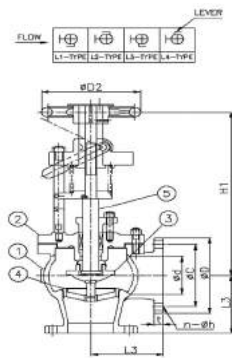

SERIES F 7399 - "L" Type

Part No.	Material
1 - Body	Cast Steel
2 - Bonnet	Cast Steel
3 - Disc	Stainless Steel
4 - Seat	Stainless Steel
5 - Stem	Stainless Steel

Test Pressure MPa[Kgf/cm ²]	
Body	0.7 [7.0]
Seat	0.2 [2.0]

	Size	d	D	C	n-h	t	H	H1	L	L3	D2
F 7399 -5K	050	50	130	105	4-15	16	335	305	220	120	160
	065	65	155	130	4-15	18	395	355	270	130	180
	080	80	180	145	4-19	18	420	370	300	140	180
	100	100	200	165	8-19	18	510	450	350	160	224
	125	125	235	200	8-19	20	570	515	420	180	250
	150	150	265	230	8-19	22	595	575	490	205	280
	200	200	320	280	8-23	22	625	605	570	230	315
F 7399 -10K	050	50	155	120	4-19	16	335	305	220	120	160
	065	65	175	140	4-19	18	395	355	270	130	180
	080	80	185	150	8-19	18	420	370	300	140	180
	100	100	210	175	8-19	18	510	450	350	160	224
	125	125	250	210	8-23	20	570	515	420	180	250
	150	150	280	240	8-23	22	595	575	490	205	280
	200	200	330	290	12-23	22	625	605	570	230	315